Life Fitness Kit Instructions

LIFELINK JUMPER CONFIGURATION

CAUTION! BEFORE BEGINNING THE REPLACEMENT PROCEDURE, GROUND YOURSELF TO THE MACHINE USING AN ANTI-STATIC GROUND STRAP

If it should become necessary to replace the LIFELINK BOARD in any of the cardiovascular training units, the installation of jumpers on the LIFELINK BOARD will be required for proper machine operation. Take note that not all replacement and connection situations will be the same due to the fact there are currently four different cardiovascular training units in service, each with differing individual requirements.

The following table shows the proper configuration actions required should you need to replace a defective LIFELINK BOARD.

Jumpers	*Stairclimbers / Circuit / Crosstrainers*	*Exercise Bikes Rear Drive CT*	*Treadmills*	*Next gen treadmills*
JW 1	IN	OUT	IN	IN
JW 2	IN	IN	IN	IN
JW 4	IN	IN	IN	IN
JW 6	IN	IN	OUT	IN
JW 8	IN	IN	IN	IN
JW 9	IN	IN	IN	OUT
JW 10	IN	IN	IN	IN
JW 11	IN	IN	IN	OUT
JW 12	IN	IN	IN	OUT
JW13	IN	IN	IN	OUT

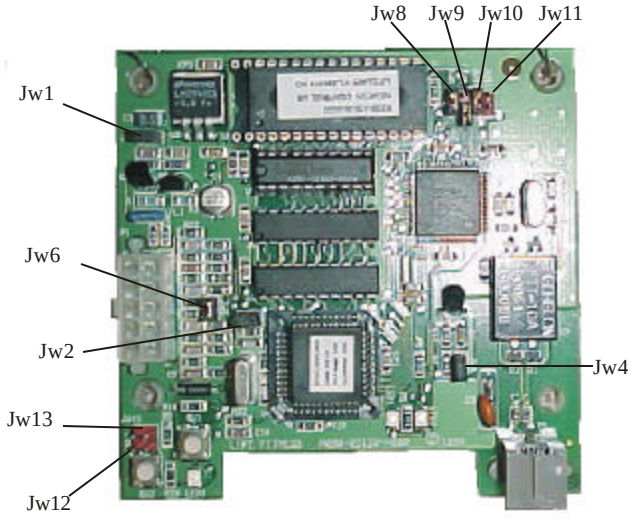

Should you require any assistance with this Kit Instruction, please direct all inquiries to:

Life Fitness Customer Support Services

PHONE: (800) 351-3737 or (847) 451-0036 / FAX: (847) 451-4137

Be sure to have the model and serial number of the product available so the phone technicians can help you as quickly and easily as possible.